



---

**KRC2 KSD**  
Robot Store Ltd.

# KRC2 KSD (KUKA SERVO DRIVE)

## Description

The KSD is the drive unit for each one of the robot and where present external axes.

Price £1150

The KSDs are rated depending on their power output in Amps

See below for a table of the common drives and the robot types:

Robot type	Axis 1	Axis 2	Axis 3	Axis 4	Axis 5	Axis 6
KR6 / KR15 / KR15L6 / KR16	KSD1-16	KSD1-16	KSD1-08	KSD1-08	KSD1-08	KSD1-08
KR30	KSD1-32	KSD1-32	KSD1-16	KSD1-08	KSD1-08	KSD1-08
KR30L15	KSD1-48	KSD1-48	KSD1-32	KSD1-08	KSD1-08	KSD1-08
KR30K / KR45 / KR60 / KR60K / KR60L30K / KR60L45K	KSD1-32	KSD1-48	KSD1-16	KSD1-08	KSD1-08	KSD1-08
KR125 / KR150 / KR200	KSD1-32	KSD1-32	KSD1-32	KSD1-16	KSD1-16	KSD1-16
KR125W	KSD1-64	KSD1-64	KSD1-32	KSD1-16	KSD1-16	KSD1-16
KR60P / KR100P / KR350 / KR500	KSD1-64	KSD1-64	KSD1-64	KSD1-32	KSD1-32	KSD1-32
KR100PA / KR160PA	KSD1-64	KSD1-64	KSD1-64	-	KSD1-32	KSD1-32
KR150 / KR180 / KR150W / KR180W / KR150K / KR180K / KR210	KSD1-48	KSD1-48	KSD1-48	KSD1-16	KSD1-16	KSD1-16
KR180PA	KSD1-48	KSD1-48	KSD1-48	-	-	KSD1-16


Drive servo	KSD1-08	KSD1-16	KSD1-32	KSD1-48	KSD1-64
Intermediate circuit voltage	0 - 770 V				
Rated current	4 A	8 A	16 A	17 A	20 A
Max. output current	8 A	16 A	32 A	48 A	64 A
Shape/ Dimensions WxHxD	88 x 240 x 180 mm			132 x 240 x 180 mm	

### ROBOT STORE LTD.

Old Bank Buildings, Upper High Street, Cradley Heath, B64 5HY  
 Tel: +44 (0)7840 913224 email: [info@robot-store.co.uk](mailto:info@robot-store.co.uk) web: <https://www.robot-store.co.uk>  
 Registered in the UK. Company Number 11097343

# Connectors

Below is a diagram of the various connectors:

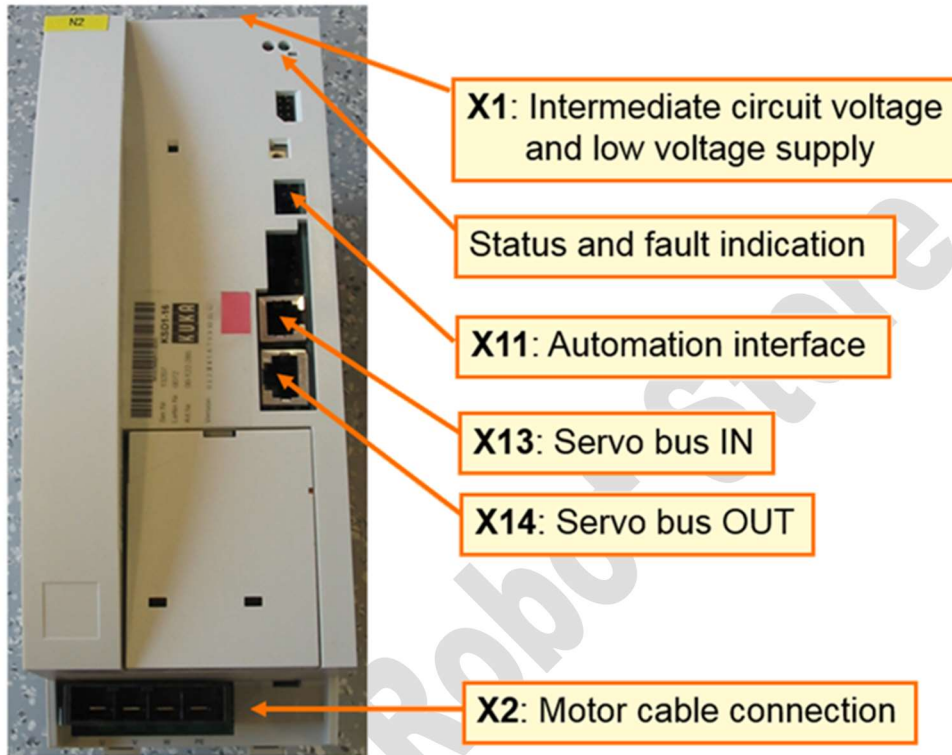


## ROBOT STORE LTD.

Old Bank Buildings, Upper High Street, Cradley Heath, B64 5HY  
Tel: +44 (0)7840 913224 email: [info@robot-store.co.uk](mailto:info@robot-store.co.uk) web: <https://www.robot-store.co.uk>  
Registered in the UK. Company Number 11097343

# Fault Diagnostics

For diagnostics the KSD has several LEDs, below is a diagram showing the location of the these diagnostic LEDs.

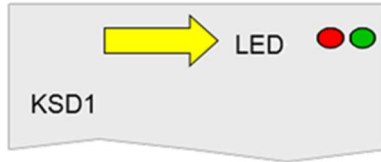

Red LED	Green LED	Meaning
Off	Flashes slowly	UIC<250V
Off	Flashes quickly	UIC>250V
Off	On	Servo enable UIC>250V
Off	Off	No 27V power supply
On	Off	Undefined drive servo state
Flashes quickly	Flashes slowly (UIC<250V)	Fault present
	Flashes quickly (UIC>250V)	
Flashes slowly	Flashes slowly (UIC<250V)	Alarm present
	Flashes quickly (UIC>250V)	

**ROBOT STORE LTD.**

Old Bank Buildings, Upper High Street, Cradley Heath, B64 5HY  
 Tel: +44 (0)7840 913224 email: info@robot-store.co.uk web: https://www.robot-store.co.uk  
 Registered in the UK. Company Number 11097343

# Removal

For removal of the KSD see the guide below:

Use screwdriver to lift  
Top clip and free KSD,  
Repeat for bottom Clip.

Note that there is no  
addressing of the KSD  
so identical KSDs can  
be swapped to aid fault  
finding



Please contact us for further information.

## ROBOT STORE LTD.

Old Bank Buildings, Upper High Street, Cradley Heath, B64 5HY  
Tel: +44 (0)7840 913224 email: [info@robot-store.co.uk](mailto:info@robot-store.co.uk) web: <https://www.robot-store.co.uk>  
Registered in the UK. Company Number 11097343